

# COORDINATING MOLDINGS for

WE CREATE *COORDINATING MATCHES*, NOT *PERFECT MATCHES* BECAUSE YOUR FLOORS AND OUR MOLDINGS USE DIFFERENT PRINTING METHODS & MATERIALS.

**HOMECREST**  
FLOORING COLLECTIONS

**oasis**

WATER RESISTANT LAMINATE FLOORING **12mm**

## Moisture Proof Quarter Round



## Moisture Proof Reducer



## Moisture Proof T-Molding



## Versatrack

For Flooring 1/4-3/8" (6-9.5 mm)  
Use with Reducer, T-Molding, & End Cap



## VersaEdge Extra Tall

Stair Nose - 1.5" Height



## Moisture Proof End Cap



## Versatrack Shim

For Flooring 3/8-1/2" (9.5-12.7 mm)  
Optional Use with Reducer, T-Molding, & End Cap



Used with Versatrack


All Moldings are 94" Long

## VersaEdge Extra Tall

The VersaEdge Stair Nose combines style and function to enhance the beauty of a staircase or step. For use on flooring with an overall thickness of up to 0.75" (19 mm).

**Surface Material:** High Wear Resistant Aluminum Oxide Laminate

**Core Material:** Aluminum




### VERSAEDGE APPLICATIONS

#### "Lock-Down" Install (e.g. Stair Treads)

Laminate/Vinyl/Hardwood/  
Engineered Wood

Vinyl/LVT  
Alternative  
Flush

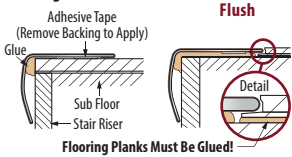


Flooring Planks Must Be Glued!

#### "Floating" Install

Laminate/  
Engineered Wood

Vinyl/LVT

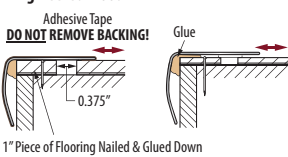

1" Piece of Flooring Nailed & Glued Down


## Moisture Proof Reducer

Reducers are used to transition from laminate flooring to floors of different height with a minimum height difference of 1/4".

**Surface Material:** High Wear Resistant Aluminum Oxide Laminate

**Core Material:** Exterior Grade Composite Wood Product

### REDUCER APPLICATIONS

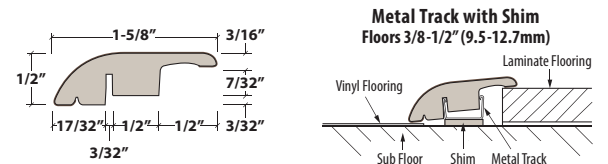


## Moisture Proof T-Molding

T-Moldings are commonly used in doorways to join two laminate floors in adjoining rooms. Recommended when making a transition from laminate floor to another floor that is approximately the same height.

**Surface Material:** High Wear Resistant Aluminum Oxide Laminate

**Core Material:** Exterior Grade Composite Wood Product

### T-MOLDING APPLICATIONS

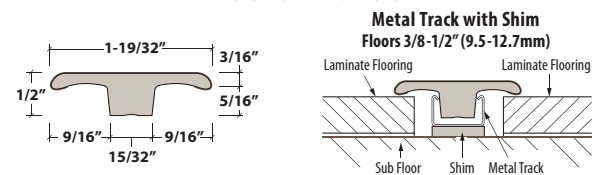


## Moisture Proof End Cap

End Caps are used to transition from laminate to carpet, masonry (fireplaces), sliding doors and other exterior door jambs.

**Surface Material:** High Wear Resistant Aluminum Oxide Laminate

**Core Material:** Exterior Grade Composite Wood Product

### END CAP APPLICATIONS

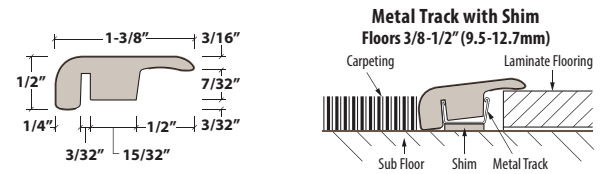


## Moisture Proof Quarter Round

Quarter Rounds are used to conceal the required expansion space between the wall and the laminate flooring.

**Surface Material:** Decorative Paper

**Core Material:** Quarter Round: Exterior Grade Composite Wood Product



FOR MORE DETAILED INSTALLATION  
INFORMATION, TIPS, AND ADVICE GO TO:  
[INSTALLATIONADVICE.COM](http://INSTALLATIONADVICE.COM)