

COORDINATING MOLDINGS for

WE CREATE *COORDINATING MATCHES*, NOT *PERFECT MATCHES* BECAUSE YOUR FLOORS AND OUR MOLDINGS USE DIFFERENT PRINTING METHODS & MATERIALS.

HOMECREST
FLOORING COLLECTIONS®

oasis

WATER RESISTANT LAMINATE FLOORING **12mm**

Moisture Proof Quarter Round



Moisture Proof Reducer



Moisture Proof T-Molding



Versatrack

For Flooring 1/4-3/8" (6-9.5 mm)
Use with Reducer, T-Molding, & End Cap



VersaEdge Extra Tall

Stair Nose - 1.5" Height



Moisture Proof End Cap



Versatrack Shim

For Flooring 3/8-1/2" (9.5-12.7 mm)
Optional Use with Reducer, T-Molding, & End Cap



Used with Versatrack


All Moldings are 94" Long

VersaEdge Extra Tall

The VersaEdge Stair Nose combines style and function to enhance the beauty of a staircase or step. For use on flooring with an overall thickness of up to 0.75" (19 mm).

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: Aluminum



VERSAEDGE APPLICATIONS

"Lock-Down" Install (e.g. Stair Treads)

Laminate/Vinyl/Hardwood/
Engineered Wood

Vinyl/LVT
Alternative
Flush




Flooring Planks Must Be Glued!

"Floating" Install

Laminate/
Engineered Wood

Vinyl/LVT



1" Piece of Flooring Nailed & Glued Down


Moisture Proof Reducer

Reducers are used to transition from laminate flooring to floors of different height with a minimum height difference of 1/4".

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: Exterior Grade Composite Wood Product

REDUCER APPLICATIONS

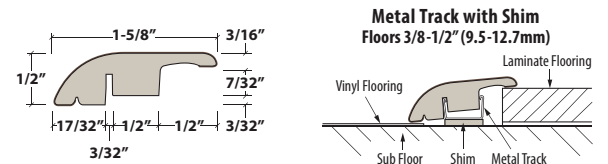


Moisture Proof T-Molding

T-Moldings are commonly used in doorways to join two laminate floors in adjoining rooms. Recommended when making a transition from laminate floor to another floor that is approximately the same height.

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: Exterior Grade Composite Wood Product

T-MOLDING APPLICATIONS

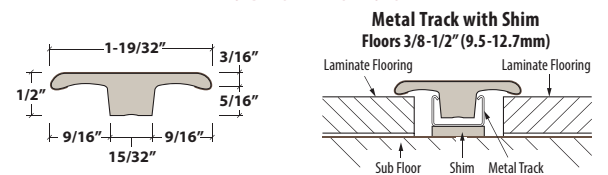


Moisture Proof End Cap

End Caps are used to transition from laminate to carpet, masonry (fireplaces), sliding doors and other exterior door jambs.

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: Exterior Grade Composite Wood Product

END CAP APPLICATIONS

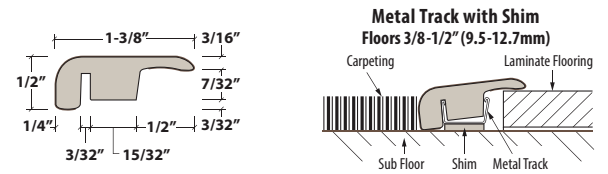


Moisture Proof Quarter Round

Quarter Rounds are used to conceal the required expansion space between the wall and the laminate flooring.

Surface Material: Decorative Paper

Core Material: Quarter Round: Exterior Grade Composite Wood Product



FOR MORE DETAILED INSTALLATION
INFORMATION, TIPS, AND ADVICE GO TO:
INSTALLATIONADVICE.COM