



Easy as 1-2-3!

## STAIR TREAD & RISER SYSTEM

HIGH PERFORMANCE 12 MIL  
WEAR LAYER

HIGH RESOLUTION WOODGRAIN  
DÉCOR LAYER

8 MM XTRA RIGID  
HIGH DENSITY COMPOSITE CORE




REVERSIBLE RISER



Bishop B



Description	Stair Tread System		
Product Type	Vinyl stair tread & riser system		
Material Type	100% Virgin PVC		
Installation Method	Construction adhesive (Scan QR code for Installation Instructions)		
Product Feature	100% Waterproof		
Surface Type	Slip-resistant natural woodgrain embossed surface		
Finish	2 coat Aluminum Oxide finish, scratch, and wear resistant		
Certifications	100% VOC-free; phthalate free; heavy-metal free; formaldehyde free		
Wear Layer	12 mil		
Décor	High resolution décor layer		
Core	Moulded profile made of high density composite		
	Stair Tread	Riser	Side Return Bullnose
Width x Length x Thickness	12.20" x 48" / 49.8" x 0.32"	7.5" x 48.2" x 0.16"	1.7" / 0.83" x 14.7" / 15.2" x 0.32"
Units per Box	1	1	1
Warranty	Limited lifetime residential & 10-year limited light commercial warranty		

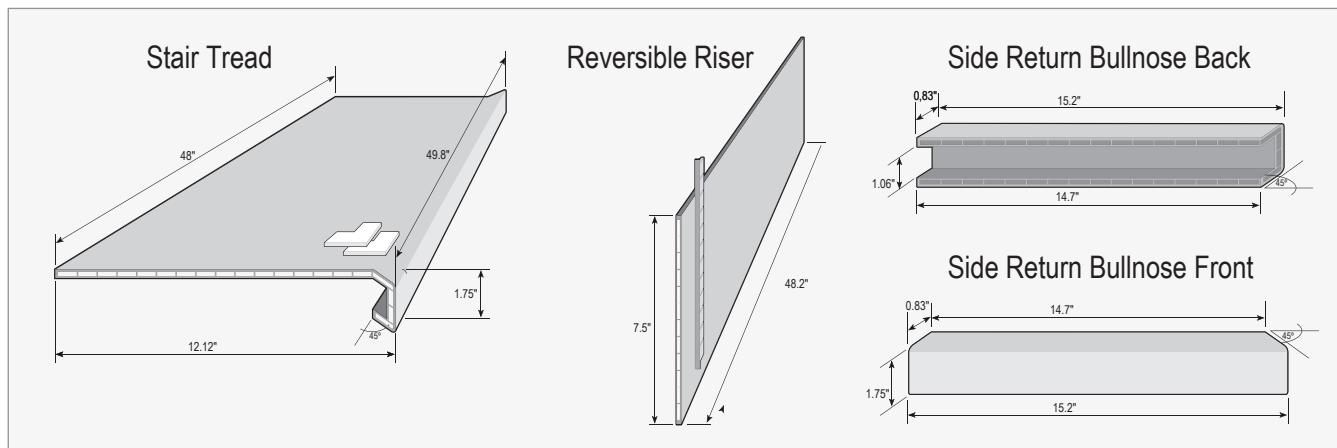

Matching Stair Tread and Riser kits available for  
Homecrest Cascade WPC and Cascade Luxury WPC  
(Pictured: Bostwick - HCVSTKIT82405)

NOTE: Colors shown may differ slightly from reality.

**Bishop**

# COORDINATING MOLDINGS

for

**HOMECREST**  
WATERPROOF  
CASCADE LUXURY WPC

**HOMECREST**  
WATERPROOF  
CASCADE WPC

## Slim Trim

For Flooring Up to 3/4" (19 mm)  
3-in-1: Reducer, T-Molding, & End Cap



## Moisture Resistant Quarter Round



## Moisture Resistant T-Molding



## Moisture Resistant Reducer



**Versatrack Shim** Used with Versatrack  
For Flooring 3/8-1 1/2" (9.5-12.7 mm)  
Optional Use with Reducer, T-Molding, & End Cap



All Moldings are 94" Long

## Technical Information

### Slim Cap

#### Moisture Resistant

Surface Material: High Wear Resistant Aluminum Oxide Laminate  
Core Material: PVC

### SlimTrack

Included with Slim Cap  
Material: Cold Roll Steel.

### Versatrack Shim

Included with Slim Cap

### SlimTrim

Functions as a Reducer, T-Molding, and End Cap.  
Surface Material: High Wear Resistant Aluminum Oxide Laminate  
Core Material: PVC

## VersaEdge Extra Tall

Stair Nose - 1.5" Height



## Moisture Resistant End Cap



## Versatrack

For Flooring 1/4-3/8" (6-9.5 mm)

Optional Use with Reducer, T-Molding, & End Cap



## Slim Cap

End Cap




FOR MORE DETAILED INSTALLATION INFORMATION, TIPS, AND ADVICE GO TO: [INSTALLATIONADVICE.COM](http://INSTALLATIONADVICE.COM)

## VersaEdge Extra Tall

The VersaEdge Stair Nose combines style and function to enhance the beauty of a staircase or step. For use on flooring with an overall thickness of up to 0.75" (19 mm).


**Surface Material:** High Wear Resistant Aluminum Oxide Laminate

**Core Material:** Aluminum



### VERSAGEDE APPLICATIONS

#### "Floating" Install




## Moisture Resistant Reducer

Reducers are used to transition from laminate flooring to floors of different height with a minimum height difference of 1/4".

**Surface Material:** High Wear Resistant Aluminum Oxide Laminate


**Core Material:** Exterior Grade Composite Wood Product

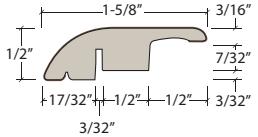

### REDUCER APPLICATIONS


#### Metal Track

Floors 1/4-3/8" (6-9.5mm)



#### Metal Track with Shim

Floors 3/8-1 1/2" (9.5-12.7mm)




## Moisture Resistant T-Molding

T-Moldings are commonly used in doorways to join two laminate floors in adjoining rooms. Also recommended when making a transition from laminate floor to another floor that is approximately the same height.

**Surface Material:** High Wear Resistant Aluminum Oxide Laminate


**Core Material:** Exterior Grade Composite Wood Product

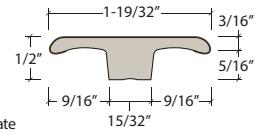

### T-MOLDING APPLICATIONS


#### Metal Track

Floors 1/4-3/8" (6-9.5mm)

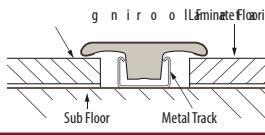

#### Metal Track with Shim

Floors 3/8-1 1/2" (9.5-12.7mm)

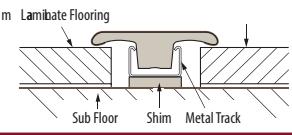


## Moisture Resistant End Cap

End Caps are used to transition from laminate to carpet, masonry (fireplaces), sliding doors and other exterior door jambs.

**Surface Material:** High Wear Resistant Aluminum Oxide Laminate


**Core Material:** Exterior Grade Composite Wood Product

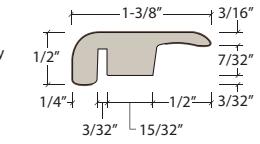

### END CAP APPLICATIONS


#### Metal Track

Floors 1/4-3/8" (6-9.5mm)

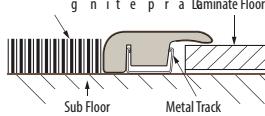

#### Metal Track with Shim

Floors 3/8-1 1/2" (9.5-12.7mm)


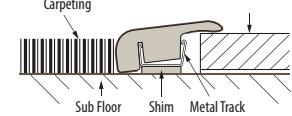


## Quarter Round (Standard or Moisture Resistant)

Quarter Rounds are used to conceal the required expansion space between the laminate and the laminate flooring. Comes as standard MDF or moisture proof.

**Surface Material:** Decorative Paper

**Core Material:** Quarter Round: Standard MDF. Moisture Proof Quarter Round: Exterior Grade Composite Wood Product

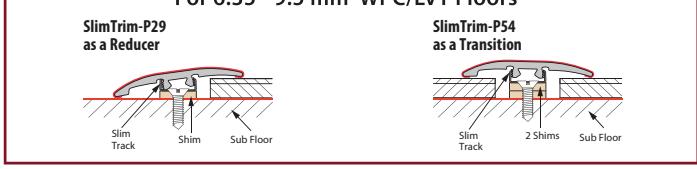


### OPTIONAL DOWEL INSTALLATION

**NOTE:** Dowel installation cannot be used on radiant heat floors.


#### ① Reducer:

Up to 3/4" (19mm)



#### ② Transition:

Up to 3/4" (19mm)



#### ③ End Cap: (Hard Surface to Carpet)

We Recommend Using a Carpet Tap Down Trim



Up to 3/4" (19mm)

